



HAL
open science

Geometrically Non-Linear Variable Kinematics Plate Models

Michele d'Ottavio, Giuseppe Mantegna, Olivier Polit

► **To cite this version:**

Michele d'Ottavio, Giuseppe Mantegna, Olivier Polit. Geometrically Non-Linear Variable Kinematics Plate Models. DeMEASS IX, A.L. Araújo, J.A. Madeira, A.R. Ribeiro, Sep 2018, Sesimbra, Portugal. <hal-04297696>

HAL Id: hal-04297696

<https://hal.parisnanterre.fr/hal-04297696v1>

Submitted on 21 Nov 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

GEOMETRICALLY NON-LINEAR VARIABLE KINEMATICS PLATE MODELS

Michele D'Ottavio*, Giuseppe Mantegna, Olivier Polit*

*LEME, UPL, Université Paris Nanterre
50, rue de Sèvres – 92410 Ville d'Avray, France
e-mail: mdottavi@parisnanterre.fr

Summary: This paper presents the extension to geometrical nonlinearities of a variable kinematics modeling approach for composite plates. Geometrical non-linearities are included by referring to von Kàrmàn's finite deflection hypothesis and, assuming the strains remain small, a linear elastic material behavior is retained. The Lagrangian description is adopted for writing the plate motion. A Ritz method is employed to solve the resulting two-dimensional differential equations in weak form within a consistent Newton-Raphson algorithm. First preliminary results verify the proposed implementation.

1. INTRODUCTION

Variable Kinematics (VK) models for composite plates are an effective means to identify the problem-dependent best model in terms of accuracy-to-computational cost ratio through a so-called mixed axiomatic-asymptotic approach [1]. The pioneering VK approach by Carrera (Carrera Unified Formulation, CUF) has been subsequently formally extended by Demasi (Generalized Unified Formulation, GUF) [2] and by D'Ottavio (Sublaminar GUF, SGUF) [3].

Geometrically linear plate models are known to provide accurate results when the out-of-plane deflection is small compared to the thickness of the plate. This is an overly restrictive assumption for realistic applications involving composite plates [4]. In this work, the extension of the SGUF plate models to include von Kàrmàn's non-linear strain is proposed, which allows to consider deflections that are of the same order of magnitude of the plate thickness.

2. FORMULATION

A total Lagrangian description is adopted by referring to Kirchhoff's stress tensor and Green's strain tensor accounting for finite deflections and infinitesimal in-plane displacements:

$$E_{\alpha\beta} = e_{\alpha\beta} + \eta_{\alpha\beta} = \frac{1}{2} (u_{i,j} + u_{j,i}) + \frac{1}{2} u_{3,\alpha} u_{3,\beta}; \quad E_{i3} = e_{i3} = \frac{1}{2} (u_{i,3} + u_{3,i}) \quad (1)$$

where, as usual, $i, j \in \{1, 2, 3\}$ and $\alpha, \beta \in \{1, 2\}$ and Einstein summation convention is adopted. In SGUF, the displacement field is approximated in each sublaminates k as

$$u_i(x_\alpha, z)^k = F_{\alpha u_i}(z) \hat{u}_{i\alpha u_i}^k(x_\alpha) \quad \text{with } \alpha_{u_i} = 0, 1, \dots, N_{u_i}^k \quad (2)$$

The plate equations are derived within the classical virtual work principle and solved by a Ritz method [5]. The non-linear problem is linearized through its incremental form and iteratively solved by a load-driven Newton-Raphson algorithm expressed by tangent and secant matrices:

$$[K_T] \{\delta U^{(m)}\} = (\lambda + \Delta\lambda)\{F^R\} - [K_S] \{\delta U^{(m-1)}\} \quad \text{with } [K_T] = [[K_0] + [K_u] + [K_\sigma]] \quad (3)$$

where $\Delta\lambda$ defines the incremental load step and δ the increment of the m^{th} iteration, respectively; $[K_0]$ is the incremental stiffness matrix, $[K_u]$ the initial displacement stiffness matrix and $[K_\sigma]$ the initial stress (or geometric) stiffness matrix. First results are shown in Figure 1.

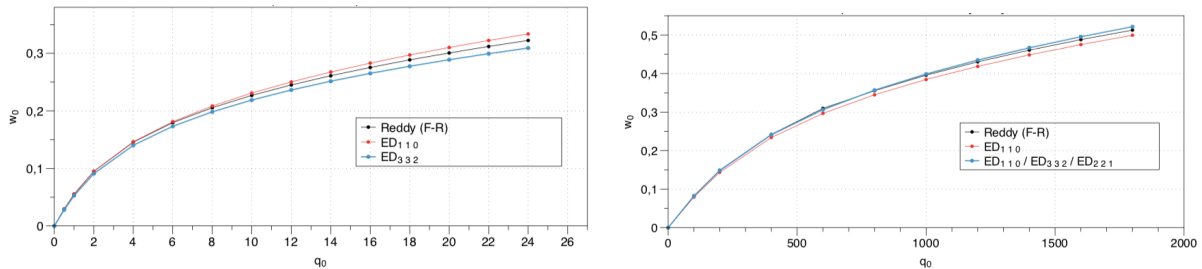


Figure 1. Mid-point deflection vs uniform pressure load of square, fully clamped orthotropic plates: one-ply (left) and 6-ply unsymmetric laminate. Reference results from [6].

REFERENCES

- [1] E. Carrera, M. Cinefra, M. Petrolo, and E. Zappino. *Finite Element Analysis of Structures through Unified Formulation*. John Wiley & Sons, Ltd, 2014.
- [2] L. Demasi. ∞^3 hierarchy plate theories for thick and thin composite plates: The generalized unified formulation. *Compos. Struct.*, 84:256–270, 2008.
- [3] M. D’Ottavio. A Sublaminates Generalized Unified Formulation for the analysis of composite structures and its application to sandwich plates bending. *Compos. Struct.*, 142:187–199, 2016.
- [4] Y. C. Fung. *Foundation of Solid Mechanics*. Prentice-Hall, Inc., 1965.
- [5] M. D’Ottavio, L. Dozio, R. Vescovini, and O. Polit. Bending analysis of composite laminated and sandwich structures using sublaminates variable-kinematic Ritz models. *Compos. Struct.*, 155:45–62, 2016.
- [6] J. N. Reddy. *Mechanics of Laminated Composite Plates and Shells: Theory and Analysis*. CRC Press, 2nd edition, 2004.